

#3
8/1/02
Patent

Attorney's Docket No. 010315-186

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

La re Patent Application of)

Morgan GUSTAVSSON)

Group Art Unit: 2833

Application No.: 10/024,006)

Examiner: Unassigned

Filed: December 21, 2001)

For: METHOD AND ARRANGEMENT)

RELATING TO DATA TRANSMISSION)

RECEIVED

JUL 23 2002

Technology Center 2100

CLAIM FOR CONVENTION PRIORITY

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

The benefit of the filing date of the following prior foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

Swedish Patent Application No. 0004804-1

Filed: December 21, 2000

In support of this claim, enclosed is a certified copy of said prior foreign application. Said prior foreign application was referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: February 27, 2002

By


Kenneth B. Leffler

Registration No. 36,075

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm
Applicant (s) SE

(21) Patentansökningsnummer 0004804-1
Patent application number

(86) Ingivningsdatum 2000-12-21
Date of filing

Stockholm, 2001-12-21

RECEIVED

JUL 23 2002

Technology Center 2100

För Patent- och registreringsverket
For the Patent- and Registration Office

Hjördis Segerlund
Hjördis Segerlund

Avgift
Fee 170:-

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Address
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86



RECEIVED
MAR-1 2002
TC 2800 MAIL ROOM

Ink. t. Patent- och reg.verket

2000 -12- 2 1

1(11)

Huvudfaxen Kassan

P16034SE.A01, BA, 21 december 2000

TITLE**METHOD AND ARRANGEMENT RELATING TO DATA TRANSMISSION****5 TECHNICAL FIELD OF THE INVENTION**

The present invention relates to a method and arrangement in expandable modules, such as backplanes, PCBs, etc. More specially, the present invention relates to an arrangement for data transmission in an expandable modular system formed of a plurality of structurally and electrically connectable modules. Between each module being located databus connectors, which allow connection and disconnection of the modules, each databus connector being connected to a driver and receiver arrangement, each comprising interconnected output and input channels, respectively.

BACKGROUND OF THE INVENTION

15

When arranging, for example microwave radio systems (e.g. MINI-LINK TM) in communications networks, there is a need for the constructor of the network to be able to acquire exactly what is needed without consideration for the future expansions of the system.

20 Presently, the constructor of the network has access to a rack provided with a number of fixed spaces for different modules. However, an expandable and flexible system is required which is not limited to a fixed number of slots in a rack.

25 In case of microwave radio systems, the data bit rate travelling through the system is high. The data and other connections between the different modules are connected through the backplane of each module. In an expandable, modular system the number of modules to be connected is initially unknown. In a system with fixed number of modules it is not a problem as the backplane when manufactured can be adapted to the number of modules and desired bit rate. However, this cannot be foreseen in an expandable system.

30

Moreover, the system beside being robust must among others be able to handle:

- hot-swap of modules (such as removal and insertion of controller cards) and backplanes without bit error,
- avoiding termination of signals at each end, which requires hardware or software control,
- 5 - a large number of connections,
- signal mismatch and reflection elimination, and
- Point-to-Multipoint configurations.

10 The same problem may occur in other systems for transmitting data with high bit rates with a need for further expansions, such as inter-connectable controller cards etc.

There are known technics for transmission of high bit rates. In single-ended mode, for example, bit rates up to for example 34 Mbit can be transmitted in a short range (10 cm) without need for termination. It is also possible to manage hot-swap and dead state for non-active sections in the signal path. The benefits of this technique are: many suppliers can deliver the systems with same performance, it is single wired, it is simple and straightforward and it allows optimising signal quality by means of termination. However, the technique has some major drawbacks: it requires high voltage with considerable Electromagnetic Interference (EMI), reduction of the signal amplitude due to the termination, short range and small interference margins.

20

Another known technique is Differential Mode. This technique is well known, can be used for very high bit rates, it has good interference margins and low voltage oscillation allows low EMI. However, this technique requires signal termination, it is expensive and can only be used in applications with fixed number of modules.

25

Reflections are usually caused by mismatched impedances, i.e. changes of impedance along the line, among others caused by incorrect termination values. If the backplane is part of a transmission line, the use of termination is usually required. When the signal travels down the backplane and encounters matched termination $R_T=Z$, no reflection occurs. This is assumed to be the best case for signal quality.

30

A non-matched termination to the backplane's loaded impedance, will result in reflections and

Ink. t. Patent- och reg.verket

2000 -12- 2 1

Huvudfaxen Kassan

3(11)

degradation of the signal quality.

Fully loaded, single-ended backplanes typically have a Z_L value of around 30Ω to 45Ω as their AC (loaded) impedance. For the matched case, the termination resistor value is equal to Z_L , and the resistors are located at both ends of the backplane.

The DC level is reduced with two terminations due to the driver operating with a larger sink current. When low-impedance (30Ω) termination resistors have been selected, we also must consider the resulting amount of load current that the backplane ICs will have to sink (per channel). The worst case occurs is when driving a backplane with 30Ω loaded impedance and a signal with a 3V swing. This will require 200 mA of load current, but if the signal swing is reduced to 1V, the current required decreases to only 67 mA.

Most TTL backplane ICs do not have the required current drive to pull the signal out of their wide threshold area; therefore, they must rely on reflections to change state. The loaded bus impedance is the reason backplane drivers are required to sink large currents. This must be done while maintaining their load voltage ratings to maintain noise margins.

Fig. 1 is a schematic wiring diagram, showing a differential mode backplane 100 comprising a fixed number of module slots S_1, \dots, S_n , a so-called Multi-Point bus configuration. A plug-in control card or the like can be inserted in each slot. For each slot is arranged an input-driver 150 and a receiver 160. The common termination is achieved by means of resistance 170 and 180 between the output channels of the drivers and input channels of the receivers. Each resistance is about 100Ω .

US 4,790,762 discloses a modular programmable controller having an expandable backplane formed of a plurality of structurally and electrically connectable backplane units, each comprising a housing having at least a pair of side walls, corresponding edges of which define a seating surface against which an input/output module may be secured. Between the side walls are located field wiring and control bus connectors which allow plug-in and removal of a module without disturbing the field wiring or control bus. The control bus segment in a backplane unit comprises an edge card receiving

Ink. t. Patent- och reg.verket

2000 -12- 2 1

4(11)

Huvudfaxen Kossan

connector in one side wall connected to a card with conductors protruding from the other side wall, the card also being connected to a control bus connector for the module.

In DE 198 06 601 a high speed back plane connects each circuit board in parallel with the other circuit boards in the system. The boards are connected together via at least one common signal line with plug connectors, which are subjected to a digital data transfer rate. For a data transfer rate whose physical data frequency is greater than 10 Mhz, the impedance of the signal lines in the bus board with plug connectors is less than 30 Ohms.

10 SUMMARY OF THE INVENTION

The main object of the present invention is to provide an expandable and flexible modular data transferring system, which solves the above-mentioned problems related with known techniques, and allows connection of an arbitrary number of modules without a need for a common end termination of the data signals. Preferably, the modular system is stackable. The arrangement according to the invention allows hot-swaps, a large number of connections, signal mismatch and reflection elimination, and Point-to-Multipoint configurations, in a simple but yet competent way.

Therefore, the initially described arrangement for each module comprises a signal termination arrangement arranged between said output channels of the driver arrangement and the input channels of the receiver arrangement. The interconnection is achieved by connecting output channels of said driver arrangement to corresponding output channels of another driver arrangement of another module. In the most preferred embodiment, the signal termination arrangement comprises an impedance load. The system is flexible, and the termination arrangement is arranged directly between the output channels of the driver arrangement and/or the input channels of the receiver arrangement.

Preferably, the module is a carrier for electronic components, such as a backplane.

The invention is most suited for data transmission is high bit rate transmission.

2000 -12- 2 1

Huvudfoxen Kassar

5(11)

The invention also relates to a backplane unit, for structurally and electrically interconnection to a second backplane unit, between each backplane unit being located wiring and databus connectors, which allow plug-in and removal of a module, each databus connector being connected to a driver and a receiver arrangement, each comprising output and input channels, said outputs being connected to said inputs. Hence, between said output channels of the driver arrangement and the input channels of the receiver arrangement a signal termination arrangement is arranged. The termination arrangement is arranged directly between the output channels of the driver arrangement and/or the input channels of the receiver arrangement. The output channels of said driver arrangement are connected to corresponding output channels of another driver arrangement through said backplane unit. Preferably, backplane unit is arranged in a high bit rate transmission system.

The invention also relates to a method of terminating signals travelling in a databus, in an arrangement for data transmission in an expandable modular system formed of a plurality of structurally and electrically connectable module, between each module being located databus connectors, which allow connection and disconnection of the modules, each databus connector being connected to a driver and a receiver arrangement, each comprising output and input channels, said outputs being connected to said inputs. The method comprises the step of arranging each module with a signal termination arrangement between said output channels of the driver arrangement and the input channels of the receiver arrangement.

BRIEF DESCRIPTION OF THE DRAWINGS

In the following, the invention will be further described in a non-limiting way with reference to the accompanying drawings in which:

- Fig. 1 is a schematic wiring diagram of a backplane according to prior art,
Fig. 2 is a schematic cross-sectional view of a first embodiment comprising backplanes, according to the invention,
Fig. 3 illustrates a schematic wiring diagram of a system according to the invention, and
Fig. 4 is a schematic side view of a second embodiment comprising printed circuit boards,

Svea Patent- och reg.verket

2000 -12- 2 1

Huvudfaxen Kassar

6(11)

according to the invention,

DETAILED DESCRIPTION OF THE EMBODIMENTS

- 5 In the following, the present invention will be described in conjunction with non-limiting embodiments relating to backplanes and printed circuit boards (PCBs). However, the teachings of the invention can be applied to any system in which data transmission and expansion are needed.

- The structure of an expandable backplane arrangement 200 is shown in a schematic way in fig.2
- 10 formed of a plurality of structurally and electrically connectable backplane units 210a-210b, three of which are shown for simplicity reasons. Between each backplane unit 210, wiring and databus connectors 220 and 225 are provided, which allow plug-in and removal of a module at least at one end of a backplane without disturbing the wiring or databus. The wiring and databus segments in each backplane unit comprise a first 220 and a second connector 225, which connect to a second 225 and
- 15 first connector 220, respectively, of the preceding or succeeding unit. Each backplane unit 210 comprises a connector 230 for connecting an external unit 240 such as a controller card, traffic generator card or the like.

- In another embodiment as shown in fig. 4, the invention can be applied to a stackable (or in other way
- 20 in series connectable) PCB assembly 400 comprising inter-connectable PCBs 410a and 410b. Each PCB is arranged to carry components 405 at least on one side. The PCBs are connected by means of connectors 420 and 425.

- The wiring diagram of a backplane provided with an arrangement according to the present invention is
- 25 schematically illustrated in fig. 3 (also applicable to PCB case). For each backplane unit 210 is provided a driver 250 and a receiver 260. Although, five backplane units are illustrated, it is obvious that the number of backplane units is optional and not limited by any means, which is the advantage of the present invention. The drivers and receivers are of conventional type, such as bus LVDS (Low-Voltage Differential Signalling) devices. The drivers and receivers can be arranged on the module 240
- 30 or on the backplane. However, due to the requirements on short signal distances, it is preferred that

Sv. t. Patent- och reg.verket

2000 -12- 2 1

Huvudfaxen Kassar

7(11)

the drivers/receivers are arranged on the module 240. In case of the PCB stack of fig. 4, the drivers and receivers (usually provided in one circuit package) are arranged directly on the PCB.

In contrast to the fixed differential mode application shown in fig. 1, the data busses are not end-terminated. Each receiver 260 is provided with a resistance (R_T) 270 between its input channels 261 and 262, which reduces reflections. Moreover, the output channels of each driver are interconnected, in this case over the backplanes (when at least two backplanes are connected). The advantage of this configuration is that the need for termination, which must be connected in and out (mechanically, electrically or through software control) is eliminated. In case of inter-connected PCBs the connection between the output channels can be achieved through the inter-connecting connectors. The result is that the impedances are distributed along the signal path. When a module is inserted or removed, some insignificant disturbance in the impedance of the modules may occur. However, through dimensioning of the terminations, this disturbance will not affect the overall impedance.

Furthermore, it is also possible to arrange the termination 270' at the output channels of the drivers or both at the output of the driver or input of the receiver 270" and 270"', as shown in the right-hand side of fig. 3. In these cases, the termination must be arranged physically close to the input channels.

For dimensioning the impedances, it is possible to start from a fixed backplane, for example having $R_T = 100 \Omega$, which gives $100//100 \Omega = 50 \Omega$. For a backplane intended for five backplane units, the R_T of each receiver will be $5 * 50 \Omega = 250 \Omega$, which can be approximated to 220Ω (a fixed standard value).

The invention is not limited to the shown embodiments but can be varied in a number of ways without departing from the scope of the appended claims and the arrangement and the method can be implemented in various ways depending on application, functional units, needs and requirements etc.

Ink. t. Patent- och reg.verket

2000 -12- 2 1

Huvudfaxen Kassar

8(11)

CLAIMS

1. An arrangement for data transmission in an expandable modular system (200, 400) formed of a plurality of structurally and electrically connectable modules (210a-210c, 410a-410b), between each module being located databus connectors (220, 420, 225, 425), which allow connection and disconnection of the modules, each databus connector being connected to a driver (250) and a receiver (260) arrangement, each comprising output and input channels, said outputs being connected to said inputs,

characterised in

that for each module said arrangement comprises a signal termination arrangement (270, 270', 270", 270''') arranged between said output channels of the driver arrangement (250) and the input channels of the receiver arrangement (260).

2. The arrangement according to claim 1,

characterised in

that said output channels of said driver arrangement (250) are connectable to corresponding output channels of another driver arrangement of another module.

3. The arrangement according to claim 1 or 2,

characterised in

that said signal termination arrangement comprises an impedance load (270, 270', 270", 270''').

4. The arrangement according to any one of preceding claims,

characterised in

that said termination arrangement is arranged directly between the output channels of the driver arrangement and/or the input channels of the receiver arrangement.

5. The arrangement according to any one of preceding claims,

characterised in

that said module is a carrier for electronic components (410a, 410b).

Ink. t. Patent- och reg.verket

2000 -12- 2 1

Huvudfaxen Kassen

9(11)

6. The arrangement according to any one of preceding claims,
characterised in
that said module is a backplane (210a- 210c).

5 7. The arrangement according to any one of preceding claims,
characterised in
that said data transmission is high bit rate transmission.

8. A backplane unit (210), for structurally and electrically interconnection to a second backplane unit,
10 between each backplane unit being located wiring and databus connectors (220, 225) which allow
plug-in and removal of a module, each databus connector being connected to a driver (250) and a
receiver (260) arrangement, each comprising output and input channels, said outputs being connected
to said inputs,
characterised in

15 that between said output channels of the driver arrangement (250) and the input channels of the
receiver arrangement (260) a signal termination arrangement (270, 270', 270'', 270''') is arranged.

9. The backplane unit (210) according to claim 8,
characterised in

20 that in that said termination arrangement is arranged directly between the output channels of the driver
arrangement and/or the input channels of the receiver arrangement.

10. The backplane unit according to claim 8 or 9,

characterised in

25 that said output channels of said driver arrangement (250) are connected to corresponding output
channels of another driver arrangement through said backplane unit.

11. The backplane unit according to any one of claims 8-10,

characterised in

30 that said backplane unit is arranged in a high bit rate transmission system.

Ink. t. Patent- och reg.verket

2000 -12- 2 1


Huvudfaxen Kassar

10(11)

12. In an arrangement for data transmission in an expandable modular system (200, 400) formed of a plurality of structurally and electrically connectable modules (210a-210c, 410a-410b), between each module being located databus connectors (220, 420, 225, 425), which allow connection and disconnection of the modules, each databus connector being connected to a driver (250) and a receiver (260) arrangement, each comprising output and input channels, said outputs being connected to said inputs, a method of terminating signals travelling in said databus,

characterised by

arranging each module with a signal termination arrangement (270, 270', 270'', 270''') between said output channels of the driver arrangement (250) and the input channels of the receiver arrangement (260).



Ink. t. Patent- och reg.verket

2000 -12- 2 1

Huvudfoxen Kassan

11(11)

ABSTRACT

The present invention relates to an arrangement for data transmission in an expandable modular system (200, 400) formed of a plurality of structurally and electrically connectable modules (210a-
5 210c, 410a-410b). Between each module being located databus connectors (220, 420, 225, 425), which allow connection and disconnection of the modules, each databus connector being connected to a driver (250) and a receiver (260) arrangement, each comprising output and input channels, said outputs being connected to said inputs. The arrangement for each module comprises a signal
10 termination arrangement (270, 270', 270'', 270''') arranged between said output channels of the driver arrangement (250) and the input channels of the receiver arrangement (260).

(Fig. 3)

11(11)

1/2

Ink. t. Patent- och reg.verket

2000-12-21

Huvudfaxen Kassan

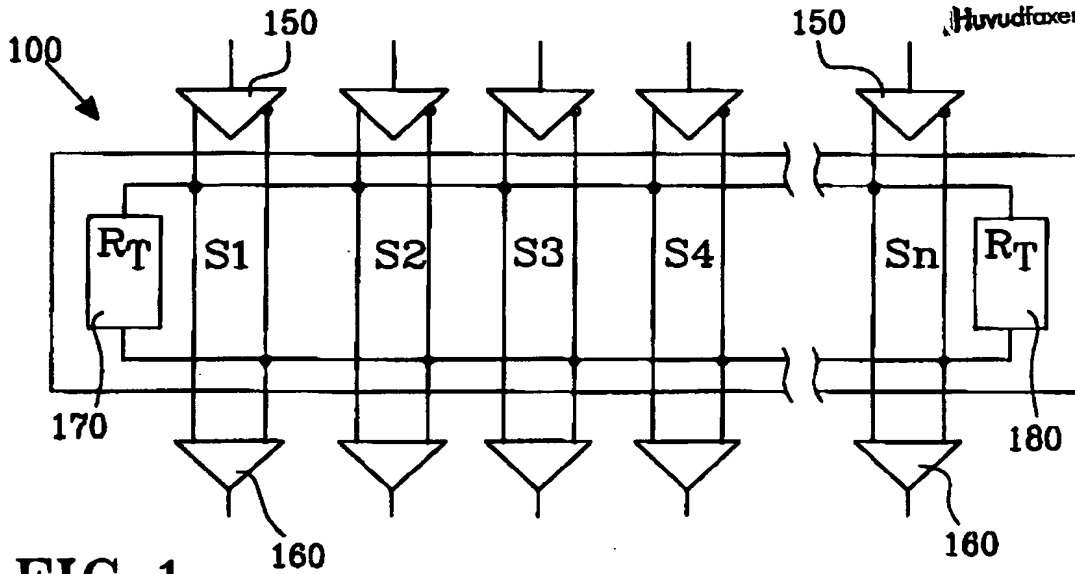


FIG. 1

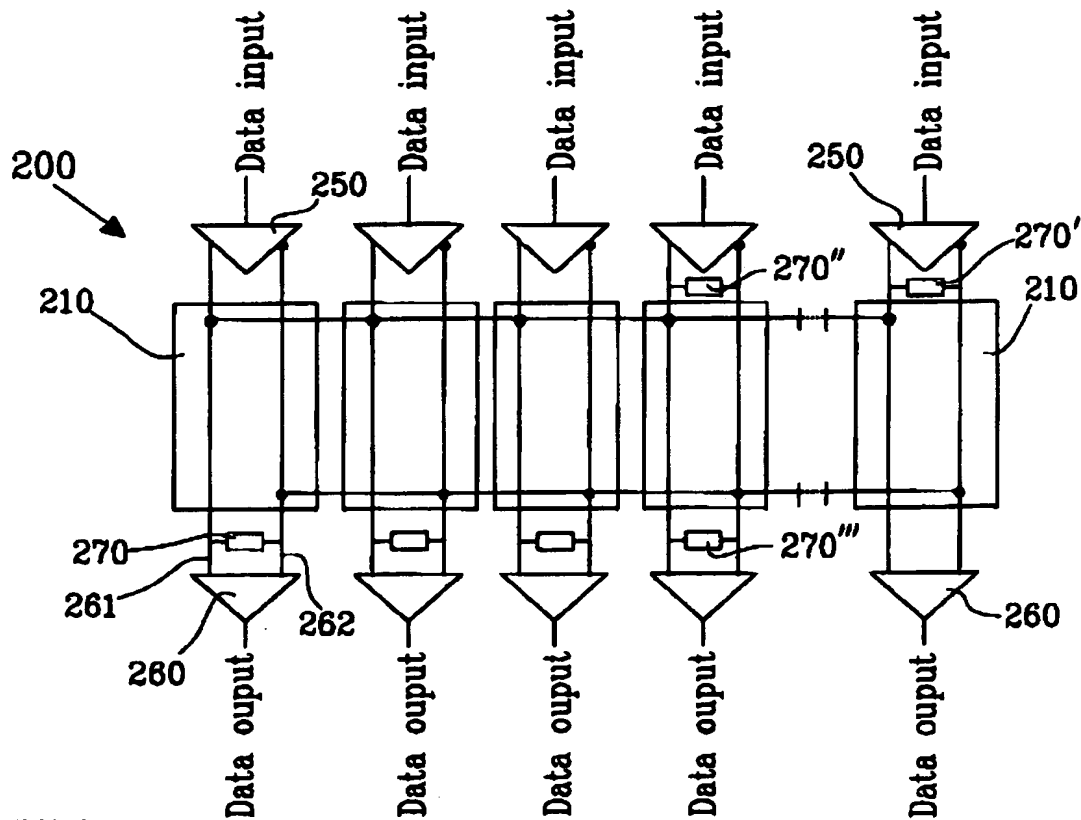


FIG. 3

Ink. t. Patent- och reg.verket

2000 -12- 2 1

Huvudfaxen Kassar

2/2

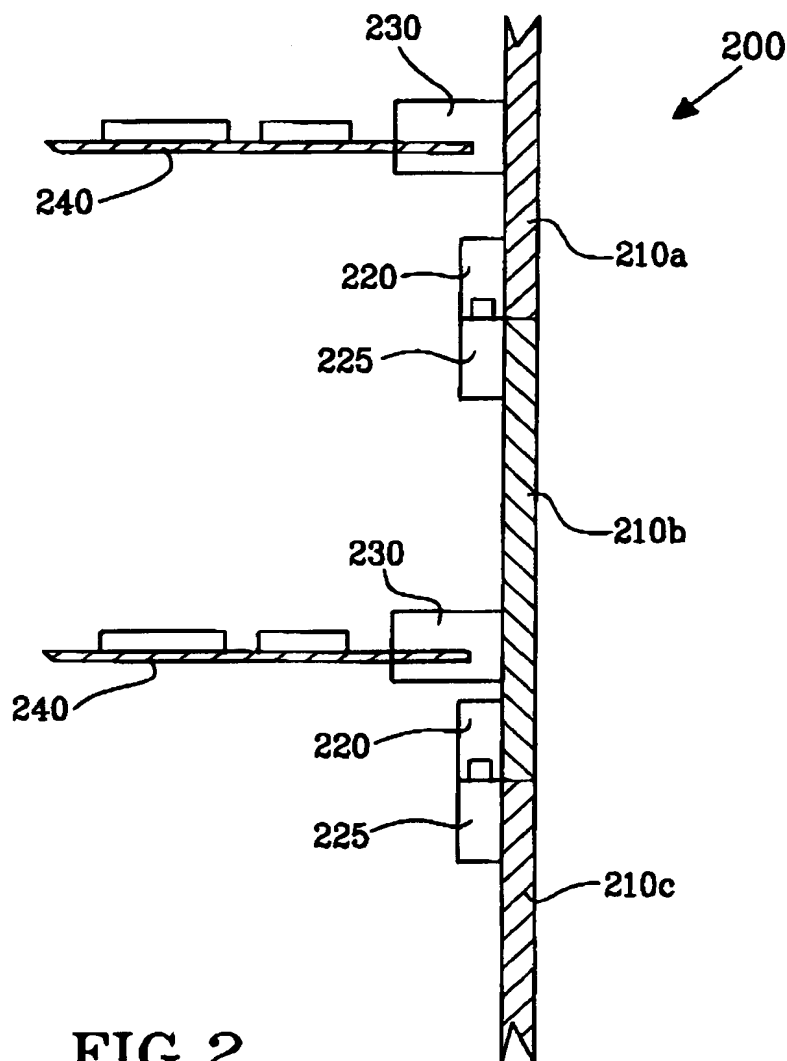


FIG.2

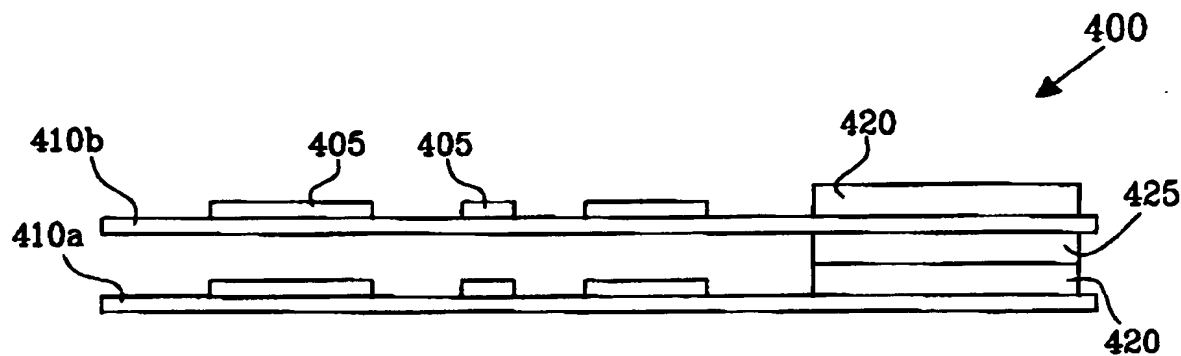


FIG. 1